



Double H brace In-Line assemblies are required where an upward angle will require additional embedment to properly anchor the upward pull of the stretched wire. Changes in slope exceeding 8% are to be implemented for this type of brace assembly. The center post of this brace assembly will be set as near the point where the slope breaks as possible.

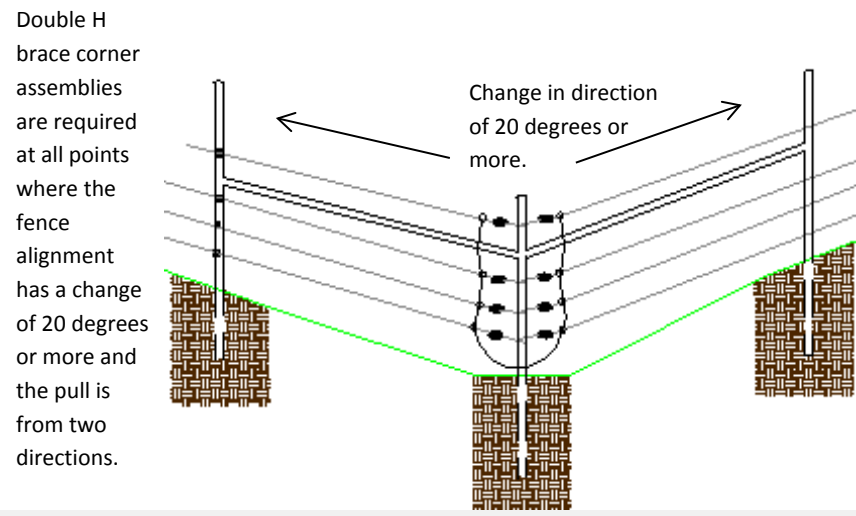

Double H brace In-line assemblies are required in straight sections of the fence line where the distance between the pull posts of corner brace assemblies and/or end panel brace assemblies exceed 2640 feet for electric fences.

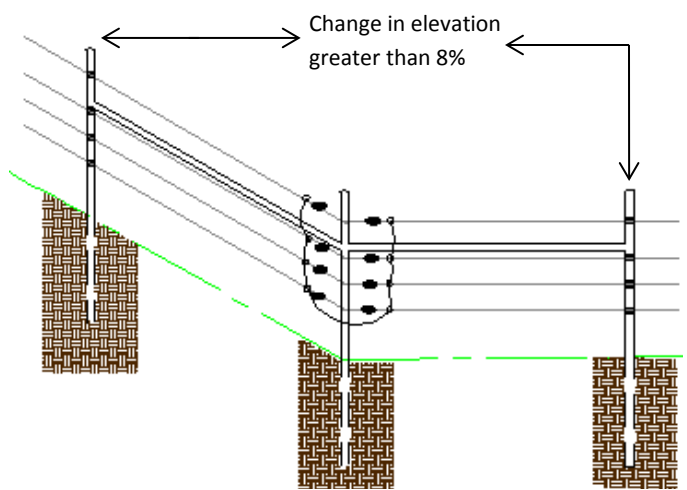